

TROFFER.C



FIXTURE CODE: **TRC**

LED TUBE

- Rated life of 50,000+ hours
- Operating temp: -20° C to 40°C
- No toxic chemicals/ROHS compliant
- ETL certified, meets UL and CSA standards
- Up to 80% energy savings

INSTALLATION

- Licensed electrician required
- Contact Noribachi for additional support

WARRANTY

- 3-year manufacturer's warranty
- **5YR** - Optional 5-year manufacturer's warranty
- U.S. manufacturing and quality control

CERTIFICATIONS



APPEARANCE

HOUSING	LENS	MOUNTING	DIFFUSION
<ul style="list-style-type: none"> • WHITE 	<ul style="list-style-type: none"> • ACRYLIC 	<ul style="list-style-type: none"> • SURFACE MOUNT • PENDANT MOUNT 	<ul style="list-style-type: none"> • NONE

ELECTRICAL CHARACTERISTICS


- Standard AC input: up to 120 - 277 VAC

NEW CONSTRUCTION OR RETROFIT

- Make any existing fluorescent lighting array LED
- Improve current lighting output, color, durability, and ambiance

DIMENSIONS

LENGTH: 48"
 WIDTH: 5"
 HEIGHT: 4"

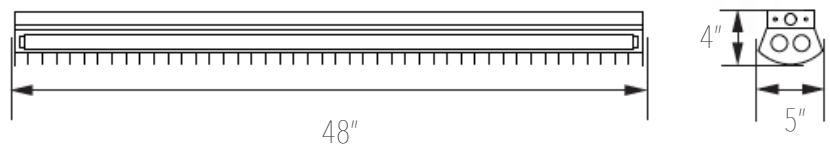

TROFFER.C

AVAILABLE LED TUBES



TUBES	WATTAGE	COLOR TEMP	LUMEN OUTPUT	CATALOG #
1 TUBE	18W	Cool White Neutral White Warm White Warm White	2,200lm 2,100lm 2,000lm 1,980lm	T84 - CW - [LENS TYPE] - N - TRC - 1TB T84 - NW - [LENS TYPE] - N - TRC - 1TB T84 - WW - CL - N - TRC - 1TB T84 - WW - FL - N - TRC - 1TB
2 TUBES	36W	Cool White Neutral White Warm White Warm White	4,400lm 4,200lm 4,000lm 3,960lm	T84 - CW - [LENS TYPE] - N - TRC - 2TB T84 - NW - [LENS TYPE] - N - TRC - 2TB T84 - WW - CL - N - TRC - 2TB T84 - WW - FL - N - TRC - 2TB