

# TROFFER.D



FIXTURE CODE: **TRD**

## APPEARANCE

HOUSING	LENS	MOUNTING	DIFFUSION
<ul style="list-style-type: none"> <li>WHITE</li> </ul>	<ul style="list-style-type: none"> <li>MICRO-PERFORATED STEEL</li> </ul>	<ul style="list-style-type: none"> <li>SURFACE MOUNT</li> <li>PENDANT MOUNT</li> </ul>	<ul style="list-style-type: none"> <li>NONE</li> </ul>

## ELECTRICAL CHARACTERISTICS

- Standard AC input: up to 120 - 277 VAC

## LED TUBE

- Rated life of 50,000+ hours
- Operating temp: -20° C to 40° C
- No toxic chemicals/ROHS compliant
- ETL certified, meets UL and CSA standards
- Up to 80% energy savings

## INSTALLATION

- Licensed electrician required
- Contact Noribachi for additional support

## WARRANTY


- 3-year manufacturer's warranty
- 5YR** - Optional 5-year manufacturer's warranty
- U.S. manufacturing and quality control

## NEW CONSTRUCTION OR RETROFIT


- Make any existing fluorescent lighting array LED
- Improve current lighting output, color, durability, and ambiance

## DIMENSIONS

LENGTH: 24"  
 WIDTH: 5"  
 HEIGHT: 4"

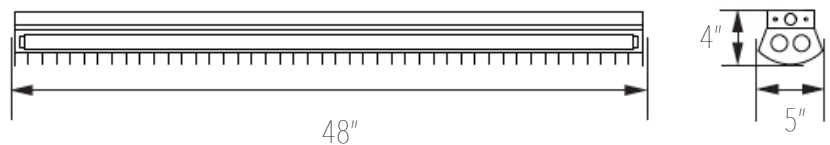

## CERTIFICATIONS



# TROFFER.D

AVAILABLE LED TUBES



TUBES	WATTAGE	COLOR TEMP	LUMEN OUTPUT	CATALOG #
1 TUBE	18W	Cool White Neutral White Warm White Warm White	2,200lm 2,100lm 2,000lm 1,980lm	T84 - CW - [LENS TYPE] - N - TRD - 1TB T84 - NW - [LENS TYPE] - N - TRD - 1TB T84 - WW - CL - N - TRD - 1TB T84 - WW - FL - N - TRD - 1TB
2 TUBES	36W	Cool White Neutral White Warm White Warm White	4,400lm 4,200lm 4,000lm 3,960lm	T84 - CW - [LENS TYPE] - N - TRD - 2TB T84 - NW - [LENS TYPE] - N - TRD - 2TB T84 - WW - CL - N - TRD - 2TB T84 - WW - FL - N - TRD - 2TB