


Emergency Battery Backup

All products feature Noribachi's exclusive Bespoke Engineered and Specifically Tailored (BEST) manufacturing methodology.

| | |
|--------------|-------|
| CATALOG #: | TYPE: |
| PROJECT: | |
| COMMENTS: | DATE: |
| PREPARED BY: | |

PRODUCT

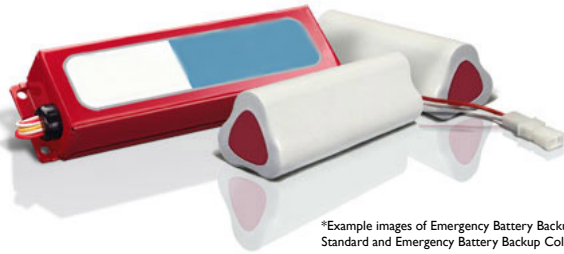

*Example images of Emergency Battery Backup Standard and Emergency Battery Backup Cold.

Order Code: EM

Order Code: EMC

Product Information

The emergency battery backup (**EM/EMC**) is an optional upgrade available for many of our LED lighting fixtures.

This add-on is available in two versions, the standard option and a cold option for cold temperature operation.

Specifications

Emergency Battery Backup Standard

- 5W, 600 lumens, 90 minutes
- Temperature Rating (Ambient): -0°C to +50°C (32°F to 122°F)
- Suitable for indoor and damp locations and for sealed & gasketed fixtures.
- UL 924
- Order Code: **EM**

Emergency Battery Backup Cold

- 23W, 2000 lumens, 90 minutes
- Temperature Rating (Ambient): -20°C to +60°C (-4°F to 140°F)
- Suitable for indoor and damp locations and for sealed & gasketed fixtures.
- UL 924
- Order Code: **EMC**
- Must provide exact voltage requirements for all backup options.

Availability

- All Fixtures

WHEN APPROVED, THE SPECIFICATIONS OUTLINED IN THIS SPEC SHEET SHALL BECOME THE SPECIFICATION FOR THE MATERIAL TO BE DELIVERED BY NORIBACHI ON THE CITED PROJECT. AN AMENDED SPEC SHEET CAN BE PROVIDED BUT ONLY AFTER WRITTEN APPROVAL BY THE CUSTOMER IS RECEIVED. THIS DOCUMENT IS THE PROPERTY OF NORIBACHI AND CAN ONLY BE USED IN CONNECTION WITH MATERIALS FURNISHED BY NORIBACHI. ©2015