

Occupancy Sensor

All products feature Noribachi's exclusive Bespoke Engineered and Specifically Tailored (BEST) manufacturing methodology.

CATALOG #:	TYPE:
PROJECT:	
COMMENTS:	DATE:
PREPARED BY:	

PRODUCT



Order Code: OS

Product Information

The Occupancy Sensor (OS) is an optional upgrade available for many of our LED lighting fixtures.

This sensor is optimized for use in general areas, aisle ways or high mounted areas such as warehouses, manufacturing floors and other high ceiling applications.




Specifications

- Variable Time Delay Setting
- Auto Temperature Calibration
- Return to Last State
- False Detection Intelligence
- Reliable Coverage up to 40 ft Mounting Height
- Operating Temperature Range: 14°F to 160°F (-10°C to 71°C)

Availability

- Canopy.O
- Highbay Series
- Linear.JJ
- Lowbay Series
- Max Troffer
- Wallpack Series

FIELD OF VIEW

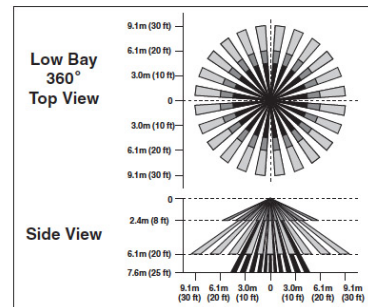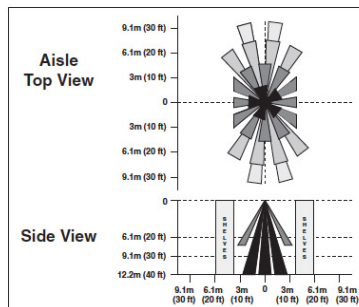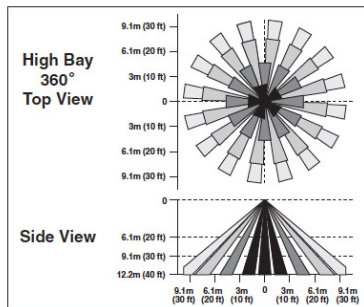

WHEN APPROVED, THE SPECIFICATIONS OUTLINED IN THIS SPEC SHEET SHALL BECOME THE SPECIFICATION FOR THE MATERIAL TO BE DELIVERED BY NORIBACHI ON THE CITED PROJECT. AN AMENDED SPEC SHEET CAN BE PROVIDED BUT ONLY AFTER WRITTEN APPROVAL BY THE CUSTOMER IS RECEIVED. THIS DOCUMENT IS THE PROPERTY OF NORIBACHI AND CAN ONLY BE USED IN CONNECTION WITH MATERIALS FURNISHED BY NORIBACHI. ©2015