

Outdoor Occupancy Sensor

All products feature Noribachi's exclusive Bespoke Engineered and Specifically Tailored (BEST) manufacturing methodology.

CATALOG #:	TYPE:
PROJECT:	
COMMENTS:	DATE:
PREPARED BY:	

PRODUCT



Order Code: OOS

Product Information

The Outdoor Occupancy Sensor (**OOS**) is an optional upgrade available for many of our LED lighting fixtures.

This sensor is optimized for use in both indoor and outdoor spaces such as industrial facilities, parking garages, greenhouses and nurseries.


Specifications

- IP Rated 65, UL 244A, UL 508
- Polycarbonate, flame retardant, UV resistant, Impact resistant
- Reliable Coverage up to 40 ft Mounting Height
- Operating Temperature Range: -40°F to 158°F (-40°C to 70°C)
- Preset 15-minute time delay


Availability

- Highbay.M
- Lowbay Series
- Wallpack Series

COVERAGE

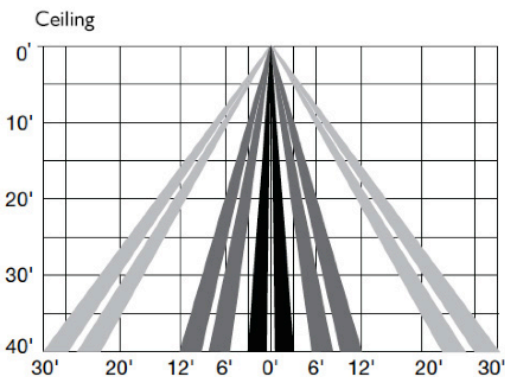

Coverage Side View

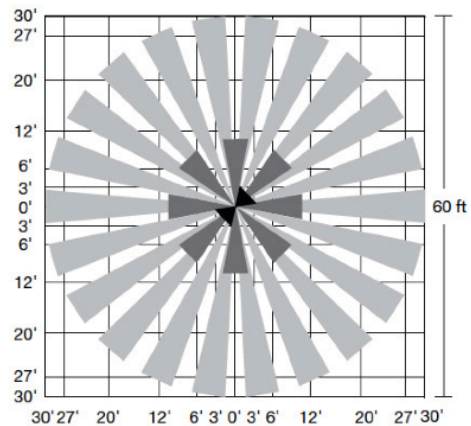

Top Coverage Pattern

WHEN APPROVED, THE SPECIFICATIONS OUTLINED IN THIS SPEC SHEET SHALL BECOME THE SPECIFICATION FOR THE MATERIAL TO BE DELIVERED BY NORIBACHI ON THE CITED PROJECT. AN AMENDED SPEC SHEET CAN BE PROVIDED BUT ONLY AFTER WRITTEN APPROVAL BY THE CUSTOMER IS RECEIVED. THIS DOCUMENT IS THE PROPERTY OF NORIBACHI AND CAN ONLY BE USED IN CONNECTION WITH MATERIALS FURNISHED BY NORIBACHI. ©2015