



SBS

FIXTURE APPEARANCE

HOUSING	LENS
<ul style="list-style-type: none"> BRONZE COL - CUSTOM 	<ul style="list-style-type: none"> TEMPERED GLASS

FIXTURE INFORMATION

- EPA Rating: 0.57
- IP Rating 65

ELECTRICAL CHARACTERISTICS

- Standard AC input: 120-277 VAC
- EMI filter: 47CFR, part 2, part 15
- Power factor: >.9
- Total harmonic distortion: <20%
- Surge protection: IEC/EN 61000-4-5 EMC test standard

LIGHT ENGINE RETROFITS

- L70 Rated life of 100,000+ hours
- Minimum CRI: 70
- Operating temp: -30° C to +60° C
- No toxic chemicals/ROHS compliant
- ETL certified, meets UL and CSA standards
- Eligible for Rebates
- 50-90% energy savings
- Manufactured in the USA

AVAILABLE LIGHT ENGINE RETROFIT CONFIGURATIONS

LED COUNT	WATTAGE	DELIVERED LUMENS	ORDER CODE
21	26.17W	2,234lm	021-SBS-[optional upgrades]-[All mountings except SQBRK]
21	26.17W	2,234lm	021-SBS-[optional upgrades]-[SQBRK]
42	60.9W	6,805lm	042-SBS-[optional upgrades]-[mounting]
63	134.7W	9,811lm	063-SBS-[optional upgrades]-[All mountings except SQBRK]
63	134.7W	9,811lm	063-SBS-[optional upgrades]-[SQBRK]

OPTIONAL UPGRADES


- RGBW - Red/Green/Blue/White light engine
- SCOL-[R, G, B] - Custom Color
- HV1 - High Voltage (480V) option for up to 150W
- COL-[RAL] - Custom Fixture Color
- MARINE - Marine Grade Coating
- EPOXY - Epoxy Coating
- VRG - Vandal Resistant Guard
- 010V - 010V Dimming
- STEP100 - Step Dimming (100 - 299W)
- BLD [%] - Bi-Level Dimming
- LYDIM - Line Voltage Dimming
- EM - Emergency Battery Backup
- EMC - Emergency Battery Backup Cold
- PC1 - 120V Button Photocell
- PC2 - 208-277V Button Photocell
- PMOCC120 - Pole Mounted Occupancy Sensor 120
- PMOCC277 - Pole Mounted Occupancy Sensor 277
- SGR1 - 100V -277V Surge Protector
- SGR2 - 480V Surge Protector
- PUL - Pulse Wireless Controller
- 80D - 80degree Beam Angle Optics
- 10YR - Optional 10 year warranty

MOUNTING

- TR - Trunion
- SF - Slip-fitter
- FLAM - Heavy-duty Adjustable Direct Pole Arm
- AM6 - 6" Arm Mount
- AM10 - 10" Arm Mount
- AM6R - 6" Arm Mount for Round Pole
- AM10R - 10" Arm Mount for Round Pole
- 90BRK - Wall Mount 90degree Bracket
- SQBRK - Wall Mount Bracket

FIXTURE DIMENSIONS

DEPTH: 5.38"
WIDTH: 12.5"
HEIGHT: 12.5"

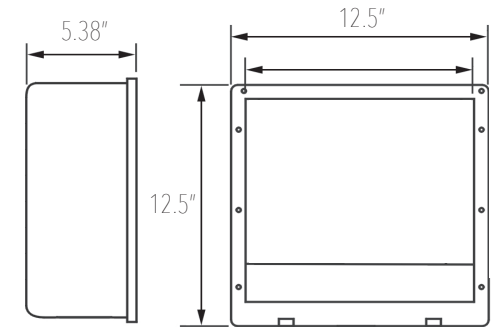

INSTALLATION

- Licensed electrician required
- Contact Noribachi for additional

WARRANTY

- 5-year manufacturer's warranty
- U.S. manufacturing and quality control

CERTIFICATIONS

