



**FIXTURE APPEARANCE**

HOUSING	LENS
<ul style="list-style-type: none"> <li>BRONZE</li> <li>COL - CUSTOM</li> </ul>	<ul style="list-style-type: none"> <li>HIGH IMPACT/ HEAT RESISTANT TEMPERED GLASS</li> </ul>

**MOUNTING**

- IP Rating 65

**ELECTRICAL CHARACTERISTICS**

- Standard AC input: 120-277VAC
- EMI filter: 47CFR, part 2, part 15
- Power factor: >.9
- Total harmonic distortion: <20%
- Surge protection: IEC/EN 61000-4-5 EMC test standard

**LIGHT ENGINE RETROFITS**

- L70 Rated life of 100,000+ hours
- Minimum CRI: 70
- Operating temp: -30° C to +60° C
- No toxic chemicals/ROHS compliant
- ETL certified, meets UL and CSA standards
- Eligible for Rebates
- 50-90% energy savings
- Manufactured in the USA

**AVAILABLE LIGHT ENGINE RETROFIT CONFIGURATIONS**

LED COUNT	WATTAGE	DELIVERED LUMENS	ORDER CODE
63	94.4W	10,970lm	063-WPF-[optional upgrades]-[mounting]

**OPTIONAL UPGRADES**


- RGBW - Red/Green/Blue/White light engine
- SCOL-[R, G, B] - Custom Color
- HVI - High Voltage (480V) option for up to 150W
- COL-[RAL] - Custom Fixture Color
- MARINE - Marine Grade Coating
- EPOXY - Epoxy Coating
- 010V - 010V Dimming
- STEP - Step Dimming (Up to 100W)
- BLD [%] - Bi-Level Dimming
- LVDIM - Line Voltage Dimming
- EM - Emergency Battery Backup
- EMC - Emergency Battery Backup Cold
- OS - Occupancy Sensor
- OOS - Outdoor Occupancy Sensor
- PC1 - 120V Button Photocell
- PC2 - 240V Button Photocell
- SGR1 - 100V -277V Surge Protector
- SGR2 - 480V Surge Protector
- PUL - Pulse Wireless Controller
- 80D - 80degree Beam Angle Optics
- 10YR - Optional 10 year warranty

**MOUNTING**

- Surface

**FIXTURE DIMENSIONS**

DEPTH: 13.75"  
 WIDTH: 18.25"  
 HEIGHT: 9.13"

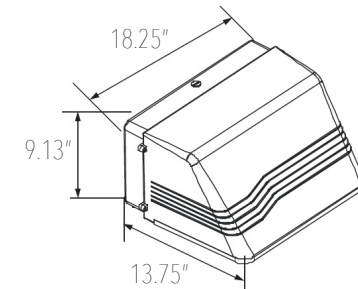

**INSTALLATION**

- Licensed electrician required
- Contact Noribachi for additional

**WARRANTY**

- 5-year manufacturer's warranty
- U.S. manufacturing and quality control

**CERTIFICATIONS**

