



Shown with 40deg optics.

Product Information

The Floodlight.XXL.S is a high-power, LED fixture.

This proprietary LED fixture features die-cast aluminum housing, tempered glass and multiple mounting options.

Applications: Security, Signage, Sports Facilities and a variety of other outdoor high-power LED lighting applications.

Performance Ratings and Certifications

UL 1598
 UL 8750
 CSA C22.2#250.0
 CSA C22.2#250.13
 IP Rating: IP65

Performance Summary

Lumens:	24,310 lm – 56,955 lm
Lumens Per Watt (Typical):	140 LPW
Power Consumption:	174.00 – 406.82 W
Light Engine:	L70 Rated Lifetime of 100,000+ hours.
CRI:	Minimum 70 CRI. Custom CRI also available.
CCT (Typical):	3000K, 4000K, 5700K, Tight bins also available.
Manufactured in the U.S. with parts from U.S. and imported.	

Fixture Information

Housing:	Die-cast aluminum
Color:	Grey. Custom color also available.
Finish:	UV stabilized powdercoat finish. Chemical resistant epoxy primer and/or Marine Grade coating also available.
Lens:	Tempered glass standard.
Mounting:	Handle Yoke.
Length:	21"
Depth:	20"
Height:	31"

Electrical System Characteristics / Data


AC Input:	120/277 VAC (standard), 480 VAC (upgrade)
FCC:	Title 47, Part 2, Part 15, Class A
EM:	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C 60% load); EN61000-3-3
EM Immunity:	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A
Withstand Voltage:	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P FG:1.5KVAC
Isolation Resistance:	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25 / 70% RH
Power Factor:	PF > 0.98/115VAC, PF > 0.92/277VAC
Total Harmonic Distortion:	THD < 20%
Standard Surge Protection:	All-Around Protection: OVP, SCP, OLP.
Enhanced Surge Protection:	Protects against surges according to IEEE C62.41.2 C and ANSI C136.2
Emergency Batt. Backup:	Optional upgrades available.

Optional Controls:

Wireless Controls:	Optional via Pulse Wireless Mesh Network
Dimming:	0-10V, line voltage, bi-level and step available.
Daylight Harvesting Sensor:	Optional
Occupancy Sensor:	Optional
Photocell:	Optional

Warranty

Five-Year Limited Warranty. Optional 10-Year Manufacturer's Warranty Available
 Full Warranty Terms Available At www.noribachi.com/products/warranty

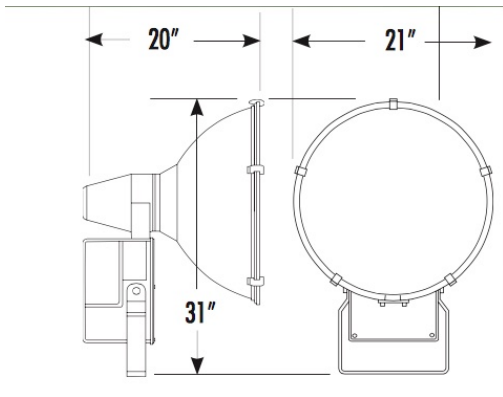

Performance Specifications

Electrical Load				
Standard Order Code	Drive Current (Amps@120VAC)	Drive Current (Amps@277VAC)	Drive Current (Amps@480VAC)	System Power (Watts)*
FLXXL.S-HEX-105-B-CW-MT	1.45	0.63	0.36	173.64
FLXXL.S-HEX-126-B-CW-MT	1.74	0.75	0.43	208.37
FLXXL.S-HEX-168-B-CW-MT	2.26	0.98	0.57	271.22
FLXXL.S-HEX-189-B-CW-MT	2.54	1.10	0.64	305.12
FLXXL.S-HEX-210-B-CW-MT	2.83	1.22	0.71	339.02
FLXXL.S-HEX-252-B-CW-MT	3.39	1.47	0.85	406.82

* ideal wattage

Operating Characteristics (Typical @5700K CCT)				
Standard Order Code	Lumens (Medium Dist)	Input Power (Watts)	Lumens per Watt	Replaces
FLXXL.S-HEX-105-B-CW-MT	24,310	173.64	140.00	400-650W
FLXXL.S-HEX-126-B-CW-MT	29,172	208.37	140.00	550-800W
FLXXL.S-HEX-168-B-CW-MT	37,970	271.22	140.00	725-1200W
FLXXL.S-HEX-189-B-CW-MT	42,716	305.12	140.00	850-1300W
FLXXL.S-HEX-210-B-CW-MT	47,463	339.02	140.00	1000-1450W
FLXXL.S-HEX-252-B-CW-MT	56,955	406.82	140.00	1250-1700W

Fixture Specifications

Construction

Die-cast aluminum housing.

Mounting Options

Handle Yoke mount available.

Optional Finishes

Custom colors available (specify RAL code). Epoxy finish also available. Marine Grade Coating also available (marine grade coating is green).

Light Distribution Patterns

T5 distribution pattern standard. 80degree and 40degree beam spread available.

Electrical System Specifications

Electrical System

Standard AC input of 120 – 277VAC. Optional upgrade to 480VAC. Driver meets maximum harmonic distortion (THD) of 20% and is ROHS compliant. Power Factor = > 0.9. Standard Surge protection according to IEC/EN 61000-4-5 EMC test standard and can protect against up to 4KV transient surge. Optional, enhanced Surge Protection protects Line-Ground, Line-Neutral, and Neutral-Ground. Protects against surges according to IEEE C62.41.2 C(10kA and 10kV) and ANSI C136.2.

Controls

Optional controls include: 0-10V, Step, line voltage and Bi-Level Dimming functionality (not guaranteed to work with all dimming systems). Occupancy and Daylight Harvest Sensors available. Optional Emergency Battery Backup: Nickel-Cadmium Batteries, 5W, 600 Lumens for 90 minutes. Optional Cold Emergency Battery Backup: 23W, 2000 Lumens for 90 minutes. The battery has a 7-10 year lifespan.

Driver

All LED drivers provide constant current to give flicker free lighting. Two different drive currents are provided; A (350 mA) and B (525 mA). Highly reliable. Suitable for dry, damp and wet locations. Compliant to worldwide safety regulations for lighting.

Ambient Temperature

We provide fixtures that can sustain ambient temperature ranging from -40F to 140F (-40C to 60C).

Wireless Control Options

Optional wireless networking using the Noribachi Pulse Wireless controller. Pulse is an Arduino-based hardware platform that provides communication between fixtures and a base station using Digi's XBEE based mesh network. Pulse controls up to 16 independent LED lighting fixtures using an FCC approved 900 MHz frequency with up to 200 Kbps data transmission speed. Transmit power output 50 mW. Data transmission rate is 156.25 kbps. 128 bit AES Encryption.

Occupancy Sensor and Daylight Harvesting

Sensor provides 60' diameter coverage from a 40' height. Time can be set from 30 seconds to 30 minutes.

RGBW Controls

Optional RGBW controls with communication to fixture via DMX512 or DMX256 and four channel controls. Four channel control uses red, green, blue and white (to control intensity). DMX controller optional, either software DMX master (via CD and USB adapter) or a physical DMX master. 2.4 GHz wireless DMX networking optional. Other frequencies available upon request.

Testing Compliance

Noribachi complies with and exceeds standards set forth by UL and CSA. All luminaires comply with UL 1598 (CSA C22.2#250.13), and UL 8750 (CSA C22.2#250.0) standards for safety. Performance testing is done in accordance with LM-79 color measurements and LM-79 distribution measurements, and LM-80 lumen maintenance testing.

Manufacturing

Manufactured in beautiful Harbor City, CA. ARRA Compliant. NAFTA Compliant. Test and burn-in of 100% of all luminaires before shipment. No less than 8-years experience in manufacturing LED-based products.

Warranty

Standard limited 5-year warranty, first year includes labor. Optional 10-year warranty available. See details at www.Noribachi.com.

Note


All safety tests and performance data is done in ambient (STP) conditions. Specifications subject to change without notice. Actual performance may differ as a result of end-user environment application. Actual wattage may differ by +/- 8%. Lumen values may vary within compliance with ANSI C78-377 (unless specifying tight color bins).

Distribution Types


Power and Lumens by Light Engine							
Distribution							
Light Engine	Drive	CCT	T1	T2	T3	T4	T5
HEX-105	B	5700	23,824	18,962	23,095	21,879	24,310
HEX-126	B	5700	28,589	22,754	27,714	26,255	29,172
HEX-168	B	5700	37,211	29,617	36,072	34,173	37,970
HEX-189	B	5700	41,862	33,319	40,581	38,445	42,716
HEX-210	B	5700	46,513	37,021	45,089	42,716	47,463
HEX-252	B	5700	55,816	44,425	54,107	51,260	56,955

Type Distribution HEX-252


T-1

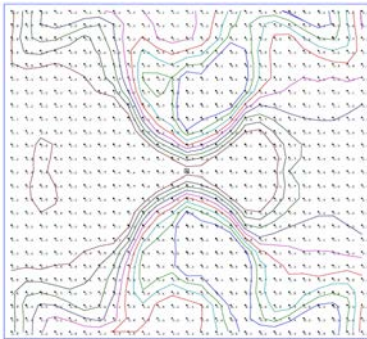


T-2

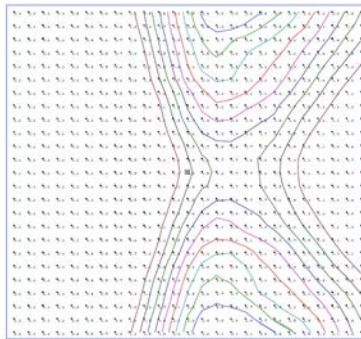


T-3

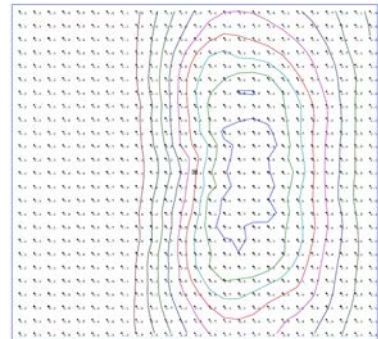

T-4

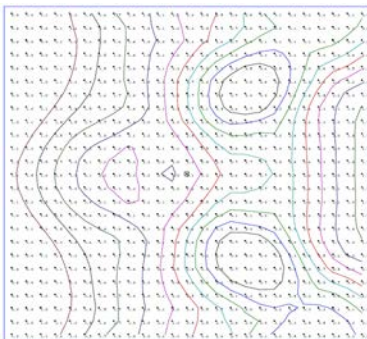

T-5

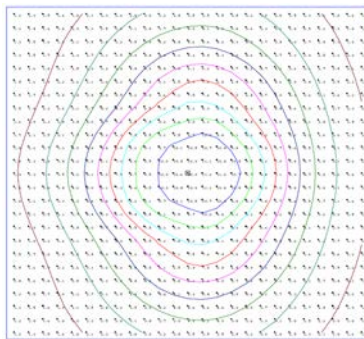

Distribution

120° Standard Beam Spread. 80° Optional Beam Spread available for certain light engines. 40° Optional Beam Spread available for certain light engines. Other Light Engine Type Distribution available upon request.

Distribution types may not be applicable for all fixture configurations.

- IES Type Distributions are generated in an open space.
- Light Distribution images are mounted at 10 feet.

Optics Specifications

White LED Optics



High brightness, high efficiency LEDs. Standard color temperature is Cool White (5700K typical). Neutral White (4000K typical) and Warm White (3000K typical) also available. All with minimum 70 CRI. Tight bins (± 50 degK variability) also available – recommended for WW installations as the eye is sensitive to variations in this color range. 40deg and 80deg beam angle optional (n/a for RGBW).

RGBW Light Engine Optics

RGBW light engine also available, compatible with DMX controller. RGBW colors, to allow changing from pure white light to any hue available. Multiple channels of LEDs produce a full spectrum of light anywhere from deepest red to farthest violet. CRI greater than 75 in the 2700K – 4000K range.

Single color light engines also available. Red=630 nanometers, Green=525 nanometers. Blue=475 nanometers.

Photometric Data for White LED Light Engine

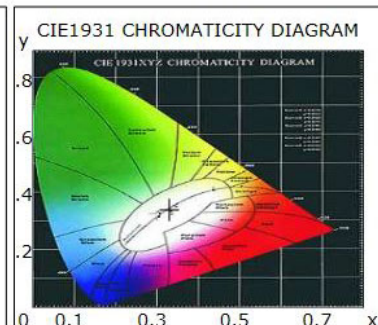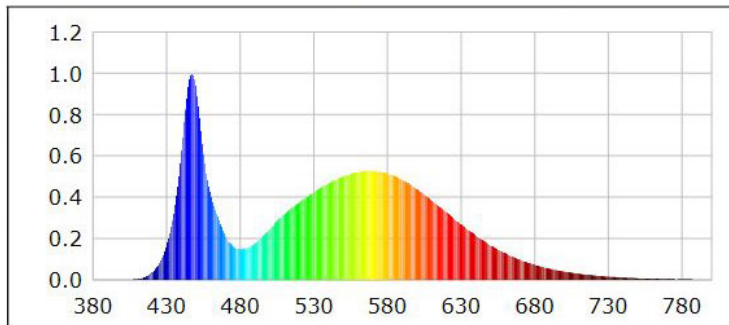


Chromaticity coordinates: $x=0.3305$ $y=0.3424$ $u(u')=0.2050$ $v=0.3186$ $v'=0.4779$
 CCT: $T_c=5700K$ ($duv=0.00156$) Color Ratio: $R=0.133$ $G=0.827$ $B=0.040$
 Peak Wavelength: 447.2nm Half Bandwidth: 19.1nm
 Dominant Wavelength: 535.2nm Color Purity: 0.020
 Color Render Index: $R_a=75.0$, $avgR(1\sim 14)=65.6$, $avgR(1\sim 15)=65.9$


R1 =74	R2 =76	R3 =76	R4 =81	R5 =75	R6 =66	R7 =84	R8 =67
R9 =0	R10=41	R11=78	R12=40	R13=73	R14=86	R15=71	

Photometric Data for RGBW LED Light Engine

Chromaticity coordinates:
 White $x = 0.3405$, $y = 0.3459$
 Green $x = 0.1687$, $y = 0.7296$
 Red $x = 0.6968$, $y = 0.3024$
 Blue $x = 0.1316$, $y = 0.0636$

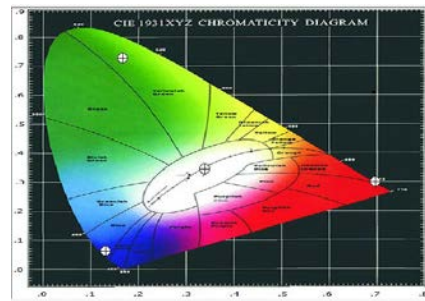

Lumen Performance

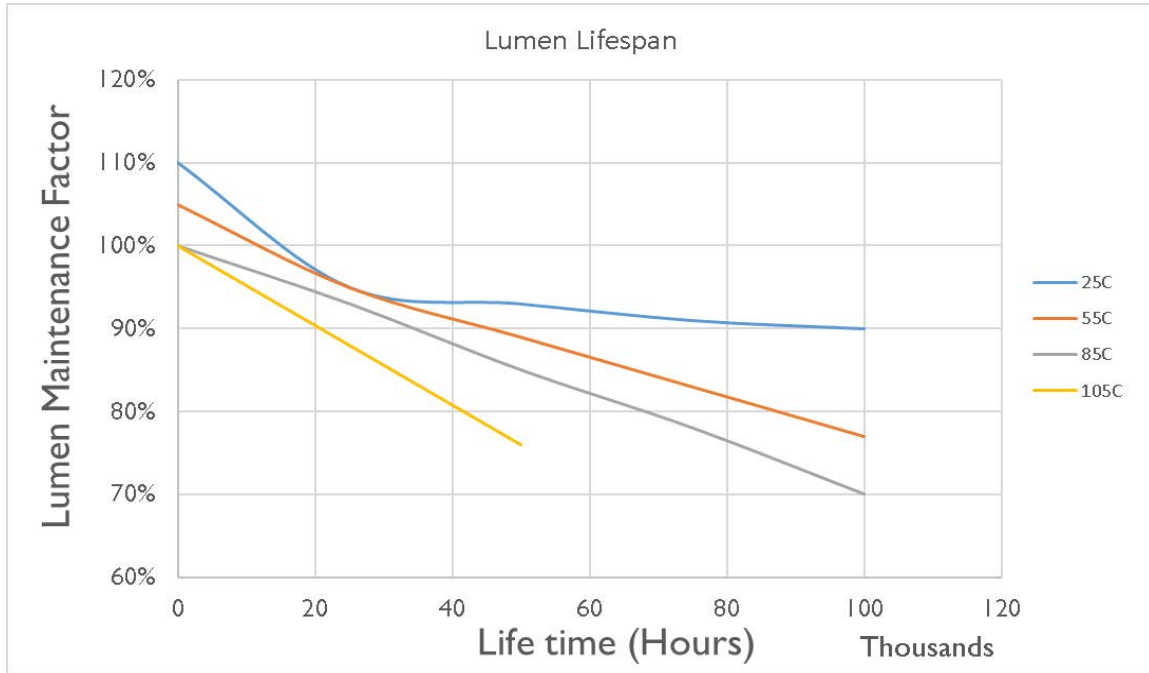




Lumen Maintenance Factors (B Drive)					
T _j (Junction Temp)	INITIAL LMF	25K HR PROJECTED LMF	50K HR PROJECTED LMF	75K HR PROJECTED LMF	100K HR PROJECTED LMF
25°C	1.10	0.95	0.93	0.91	0.90
55°C	1.05	0.95	0.89	0.83	0.77
85°C	1.00	0.93	0.85	0.78	0.70
105°C	1.00	0.88	0.76	N/A	N/A

Each temperature has an independent initial value. In accordance with IESNA TM021011, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip). In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip).

Lumen Multiplier	
AMBIENT TEMPERATURE	LUMEN MULTIPLIER
10°C	1.032
15°C	1.021
25°C	1.000
40°C	0.968
50°C	0.946

How to Order

Sample Order Code: Only include the optional upgrades you need.

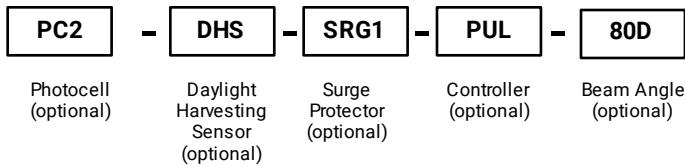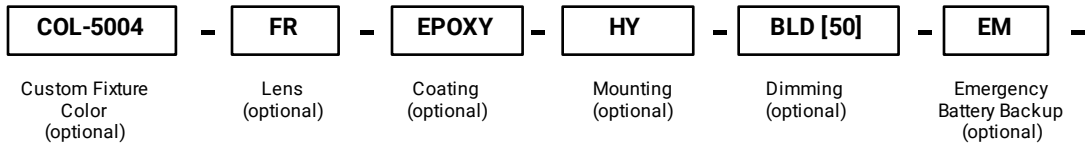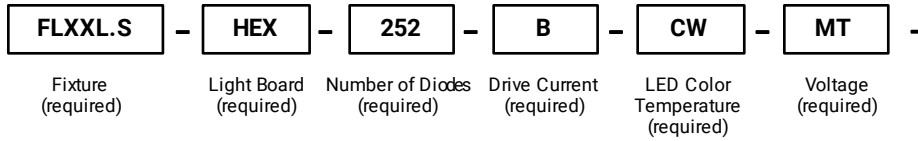

Ordering Information

Numbering Order	Specification	Required or Optional	Allowed Values	Description
1	Fixture	Required	FLXXL.S	For Floodlight.XXL.S
2	Light Board	Required	HEX	For FLXXL.S
3	Number of Diodes	Required	105	For HEX-105
			126	For HEX-126
			168	For HEX-168
			189	For HEX-189
			210	For HEX-210
			252	For HEX-252
4	Drive Current	Required	A	A (350mA) drive current
			B	B (525mA) drive current
5	LED Color Temperature	Required	CW	Standard Cool White LEDs (5700K)
			NW	Neutral White LEDs (4000K)
			WW	Warm White LEDs (3000K)
			[Specific degree Kelvin]	Specific color temp LEDs [Specific degree Kelvin]
			TB1 [Specific degree Kelvin]	Tight Bin LED Color [Specific degree Kelvin]
			TB2 [Specific degree Kelvin]	Tight Bin LED Color [Specific degree Kelvin] for > 150W
			RGBW	Red/Green/Blue/White light engine
6	Voltage	Required	SC-[R,G,B]	Single color Red, Green or Blue light engine
			MT	Standard AC input: 120VAC - 277VAC
			HV1	High Voltage (480VAC) option for up to 150W
7	Custom Fixture Color	Optional	HV2	High Voltage (480VAC) option for over 150W
			COL-[RAL]	Custom Fixture Color (RAL code)
8	Lens	Optional	FR	Frosted Lens
			POLY	Polycarbonate
9	Coating	Optional	COAT	Marine Grade Coating
			EPOXY	Epoxy coating
10	Mounting	Optional	TR	Trunnion Mount
			TN	Tennon Mount
11	Dimming	Optional	010V	0 - 10V dimming
			STEP	Step dimming (Up to 100W)
			STEP100	Step dimming (100-299W)
			STEP300	Step dimming (>300W)
			LVDIM	Line voltage dimming
12	Emergency Battery Backup	Optional	BLD[%]	Bi-level dimming
			EM	Emergency Battery Backup
13	Photocell	Optional	EMC	Emergency Battery Backup - Cold
			PC1	Photocell for 120V applications
14	Daylight Harvesting Sensor	Optional	PC2	Photocell for 277V applications
			DHS	Daylight Harvesting Sensor
15	Surge Protection	Optional	SRG1	Enhanced surge protection for 120-277VAC
			SRG2	Enhanced surge protection for 480VAC
16	Controller	Optional	PUL	Pulse Wireless Controller
17	Beam Angle	Optional	40D	40degree Beam Angle Optics
			80D	80degree Beam Angle Optics